
HAZARD ZONE JOBS CHECKLIST					
For each "caution zone job" find any physical risk factors that apply. If a hazard exists, it must be reduced below the hazard level or to the degree technologically and economically feasible.					
Movements or postures that are a regular and forseeable part of the job, occurring more than one day per week, and more frequently than one week per year.			Hazard Exists	Job Position evaluated:	No. of employees in these jobs?
Awkward Post	ture			Comments/C	bservations
	1. Working with the hand(s) above the head, or the elbows above the shoulders	More than 4 hours total per day			
	2. Repeatedly raising the hand(s) above the head, or the elbow(s) above the shouder(s) more than once per minute	More than 4 hours total per day			
	3. Working with the neck bent more than 45° (without support or the ability to vary posture)	More than 4 hours total per day			
	4. Working with the back bent forward more than 30° (without support or the ability to vary posture)	More than 4 hours total per day			
	5. Working with the back bent forward more than 45° (without support or the ability to vary posture)	More than 2 hours total per day			
	6. Squatting	More than 4 hours total per day			
	7. Kneeling	More than 4 hours total per day			

High Hand Force



Comments/Observations

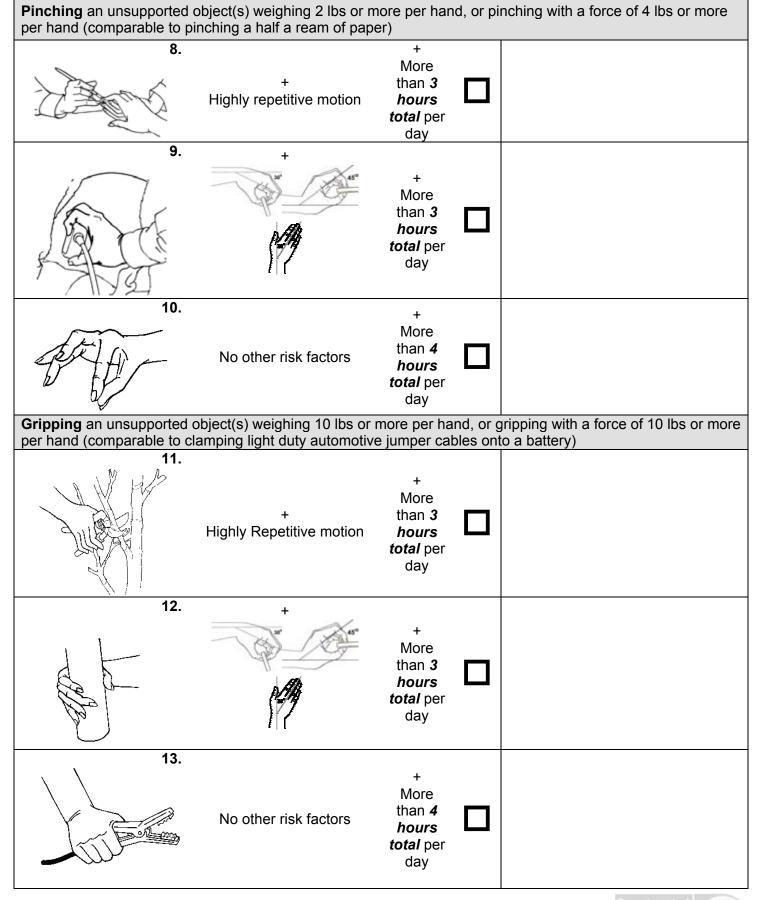

Department of

Highly Repetitive Motion


Highly Repetitive Motion				Comments/ Observations
Using the same motion with little or no variation every few seconds (excluding keying activities)				
14.	+ + High, forceful exertions with the hand(s)	+ More than 2 hours total per day		
15.	No other risk factors	+ More than 6 hours total per day		
Intensive keying				
16.	+	+ More than 4 hours total per day		
17.	No other risk factors	+ More than 7 hours total per day		
Repeated Impact				Comments/ Observations
18.	Using the hand (heel/base of palm) as a hammer more than once per minute	+ More than 2 hours total per day		
19.	Using the knee as a hammer more than once per minute	+ More than 2 hours total per day		

Calculator for analyzing lifting operations


Company	

Job

 Enter the weight of the object lifted.



2 Circle the number on a rectangle below that corresponds to the position of the person's hands when they begin to lift or lower the objects.

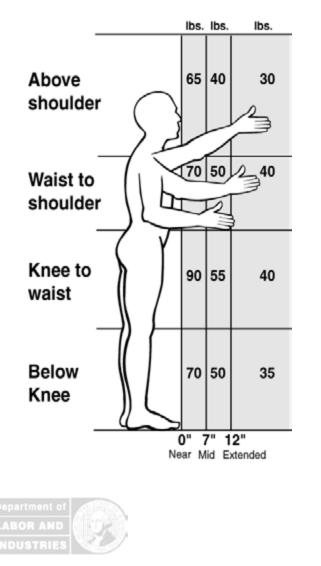

Evaluator

Date

3 Circle the number that corresponds to the times the person lifts per minute and the total number of hours per day spent lifting.

Note: For lifting done less than once every five minutes, use 1.0


How many lifts	How many hours per day?				
per minute?	1 hr or less	1 hr to 2 hrs	2 hrs or more		
1 lift every 2-5 min	1.0	0.95	0.85		
1 lift every min	0.95	0.9	0.75		
2-3 lifts every min	0.9	0.85	0.65		
4-5 lifts every min	0.85	0.7	0.45		
6-7 lifts every min	0.75	0.5	0.25		
8-9 lifts every min	0.6	0.35	0.15		
10+ lifts every min	0.3	0.2	0.0		

4 Circle 0.85 if the person twists 45 degrees or more while lifting.

0.85

Otherwise circle 1.0

5 Copy below the numbers you have circled in steps 2, 3, and 4.

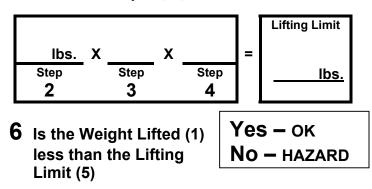

Note: If the job involves lifts of objects with a number of different weights and/or from a number of different locations, use Steps 1 through 5 above to:

- 1. Analyze the 2 worst-case lifts—the heaviest object lifted and the lift done in the most awkward posture.
- 2. Analyze the most commonly performed lift. In Step 3, use the frequency and duration for <u>all</u> the lifting done in a typical workday.

7 SOLUTIONS PRINCIPLES

To find the most appropriate solution for this job, look for the lowest number you used to do the calculations (2, 3, 4)


 HANDS POSITION (2) Reduce the horizontal distance from the body Remove barriers, obstacles Reduce weight of load Reduce capacity of the container Team lift the object with two or more workers Design workstation with the adjustable heights to eliminate trunk bent forward Provide handholds Store objects at 30 inches off the floor 	 FREQUENCY (3) Increase weight of a load so it requires mechanical assist Improve layout to minimize manual material handling Use mobile storage racks
 DURATION (3) Use mechanical assist such as overhead hoist, manipulator, vacuum lift, pneumatic balancer, forklift Eliminate the use of deep shelves Job rotation to other jobs where no lifting is required 	 TWISTING (4) Redesign workstation layout to eliminate trunk twisting Locate lifting operations in front of the body Use slides, gravity, chutes to eliminate lifting/twisting

Calculator for Hand-Arm Vibration

1. Find the vibration value for the tool. (Get it from the manufacturer look it up at this website <u>http://umetech.niwl.se/Vibration/action.lasso?-</u><u>database=HAVbase.fp3&-layout=Normal&-response=HAVSearch.html&-show</u> On the graph below mark the point on the left side shown as Vibration value.

2. Find out how many total hours per day the employee is using the tool and mark that point on the bottom of the chart below.

3. Trace a line into the graph from each of these two points until they cross.

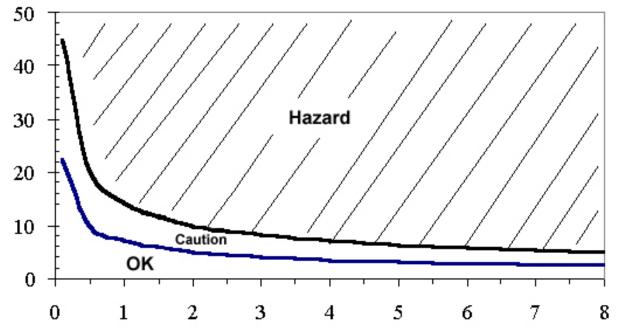

- **4.** Interpretation
 - a. If that point lies in the crosshatched "Hazard" area above the upper curve, then the vibration hazard must be reduced below the hazard level or to the degree technologically and economically feasible.
 - b. If the point lies between the two curves in the "Caution" area, then the job remains as a "Caution Zone Job."
 - c. If the point falls in the "OK" area below the bottom curve, then no further steps are required.

Note: The caution limit curve (bottom) is based on an 8-hour energy-equivalent frequency- weighted acceleration value of 2.5 m/s^2 . The hazard limit curve (top) is based on an 8-hour energy-equivalent frequency-weighted acceleration value of 5 m/s^2 .



Duration

Vibration

Hrs.

m/s2